



Universal converter

9116B

- Input for RTD, TC, Ohm, potentiometer, mA and V
- Supply for 2-wire transmitters
- Active / passive mA output and relay output
- Can be supplied separately or installed on power rail, PR type 9400
- SIL 2-certified via Full Assessment



Advanced features

- Configuration and monitoring by way of detachable display front (PR 4500); process calibration, signal and relay simulation.
- Advanced relay configuration, e.g. setpoint, window, delay, sensor error indication and power monitoring.
- Copying of the configuration from one device to others of the same type via PR 4500.
- Reduced Uo Ex data < 8.3 V for active input signals.
- TC inputs with internal CJC or external CJC for higher accuracy.
- Active / passive mA output via the same two terminals.

Application

- 9116B can be mounted in the safe area and in zone 2 / cl. 1 div. 2 and receive signals from zone 0, 1, 2 and zone 20, 21, 22 including M1 / Class I/II/III, Div. 1, Gr. A-G.
- Conversion and scaling of temperature, voltage, potentiometer and linear resistance signals.
- Power supply and signal isolator for 2-wire transmitters.
- Monitoring of error events and cable breakage via the individual status relay and/or a collective electronic signal via the power rail.
- The 9116 has been designed, developed and certified for use in SIL 2 applications according to the requirements of IEC 61508.
- Suitable for the use in systems up to Performance Level "d" according to ISO-13849.


Technical characteristics

- 1 green and 1 red front LED indicate operation status and malfunction. 1 yellow LED indicates relay status.
- 2.6 kVAC galvanic isolation between input, output and supply.

Mounting

- The devices can be mounted vertically or horizontally without distance between neighbouring units.

Applications

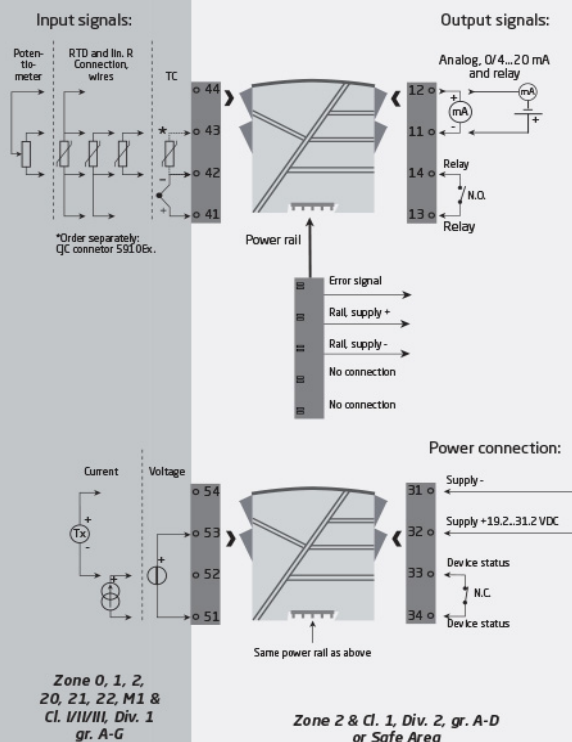

Order

Type	Max. loop voltage	I.S. / Ex approvals
9116B	U _o 28 VDC : 1	ATEX, IECEx, FM, : - INMETRO, EAC-Ex, UKEX
	U _o 21.4 VDC : 2	UL 913, ATEX, IECEx, FM, : -U9 INMETRO, EAC-Ex, UKEX
		KCs, ATEX, IECEx, FM, : - KCs INMETRO, EAC-Ex, UKEX

Example: 9116B2

Environmental Conditions

Operating temperature.....	-20°C to +60°C
Storage temperature.....	-20°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & meas. / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ PR 4500.....	109 x 23.5 x 131 mm
Weight approx.....	185 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm ² AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6
2...13.2 Hz.....	±1 mm
13.2...100 Hz.....	±0.7 g

Common specifications

Supply	
Supply voltage.....	19.2...31.2 VDC
Fuse.....	1.25 A SB / 250 VAC
Max. required power.....	≤ 2.1 W
Max. power dissipation.....	≤ 1.7 W

Isolation voltage	
Test /working: Input to any.....	2.6 kVAC / 300 VAC reinforced isolation
Analog output to supply.....	2.6 kVAC / 300 VAC reinforced isolation
Status relay to supply.....	1.5 kVAC / 150 VAC reinforced isolation

Response time

Temperature input, programmable (0...90%, 100...10%).....	1...60 s
mA / V input (programmable).....	0.4...60 s

Auxiliary supplies

9116x1x: 2-w. sup. (term. 54...52).....	28...16.5 VDC / 0...20 mA
9116x2x: 2-w. sup. (term. 54...52).....	21.4...16.5 VDC / 0...20 mA
Programming.....	PR 4500 communication interfaces
Signal dynamics, input.....	24 bit
Signal dynamics, output.....	16 bit
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Accuracy.....	Better than 0.1% of sel. range

Input specifications

RTD input	
RTD type.....	Pt10/20/50/100/200/250; Pt300/Pt400/500/1000; Ni50/100/120/1000
Cable resistance per wire.....	50 Ω (max.)
Sensor current.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire).....	< 0.002 Ω / Ω
Sensor error detection.....	Programmable ON / OFF
Short circuit detection.....	Yes
Potentiometer input	
Potentiometer min...max.....	10 Ω...10 kΩ
TC input	
Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC) via ext. sensor in 5910.....	20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C
CJC via int. mounted sensor.....	±(2.0°C + 0.4°C * Δt)

Current input	
Measurement range.....	0...23 mA
Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance.....	Nom. 20 Ω + PTC 50 Ω
Sensor error detection.....	Loop break 4...20 mA

Voltage input	
Measurement range.....	0...12 VDC
Programmable measurement ranges.....	0/0.2...1, 0/1...5, 0/2...10 VDC
Input resistance.....	Nom. >10 MΩ

Output specifications

Current output	
Signal range.....	0...23 mA
Programmable signal ranges.....	0...20/4...20/20...0/20...4 mA
Load (@ current output).....	≤ 600 Ω
Load stability.....	≤ 0.01% of span / 100 Ω
Sensor error indication.....	0 / 3.5 / 23 mA / none
NAMUR NE43 Upscale/Downscale.....	23 mA / 3.5 mA
Current limit.....	≤ 28 mA

Passive 2-wire mA output	
Max. external 2-wire supply.....	26 VDC
Effect of external 2-wire supply voltage variation.....	< 0.005% of span / V

Relay output	
Relay functions.....	Setpoint, Window, Sensor error, Power and Off
Max. voltage.....	250 VAC / VDC
Max. current.....	2 A
Max. AC power.....	500 VA
Max. DC current, resistive load > 30 VDC.....	See manual for details

Status relay	
Max. voltage.....	125 VAC / 110 VDC
Max. current.....	0.5 AAC / 0.3 ADC
Max. AC power.....	62.5 VA / 32 W

Observed authority requirements

EMC.....	2014/30/EU & UK SI 2016/1091
LVD.....	2014/35/EU & UK SI 2016/1101
RoHS.....	2011/65/EU & UK SI 2012/3032
ATEX.....	2014/34/EU & UK SI 2016/1107
EAC.....	TR-CU 020/2011
EAC Ex.....	TR-CU 012/2011
EAC LVD.....	TR-CU 004/2011

Approvals

ATEX.....	KEMA 10ATEX0053 X
IECEx.....	KEM 10.0022X
UKEX.....	DEKRA 21UKEX0177X
UKEX.....	DEKRA 23UKEX0104X
c FM us.....	FM19US0058X / FM19CA0031X
INMETRO.....	DEKRA 23.0006X
c UL us, UL 61010-1.....	E314307
c UL us, UL 913.....	E233311 (only 9116xx-U9)
KCs.....	21_AV4BO_0176X / 21_AV4BO_0177X (only 9116Bx-KCs)
EAC Ex.....	RU C-DK.HA65.B.00355/19
DNV Marine.....	TAA00000JD
ClassNK.....	TA24034M
SIL.....	SIL 2 certified & fully assessed acc. to IEC 61508